


ALINS

Double Bubble Foil Insulation

Double Bubble Foil is two layers of 1/8" barrier bubble film laminated between two layers of metalized film. Double Bubble Foil is designed to be used for water heater, metal and commercial buildings (photos 1 & 2), stud walls, roofing systems, basements, and crawl spaces when reflectivity and higher R factors are required. Vapor Retardant.

Features

- Clean, Lightweight, Easy To Install
- Class A / Class 1 Fire Rating
- High Thermal R-Values
- Saves Energy and Money

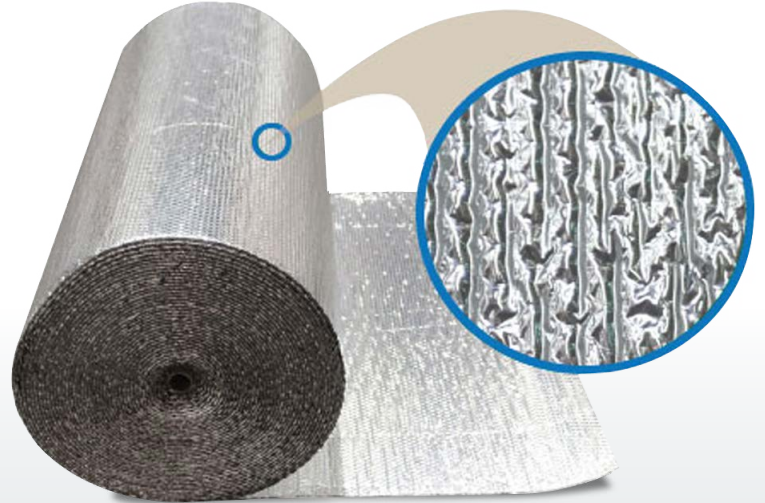

Specifications

Product Description	Two layers of 1/8" barrier bubble film laminated between two layers of reflective metalized film
Contact Temperature Range	-60°F to 180°F (-51°C to 82°C)
Thickness	1/8" nominal
Water Vapor Transmission	.02 perms ASTM E96
Puncture Resistance	60 lbs/in
Pliability	No Cracking
Linear Shrinkage	None
Mold & Mildew	No Growth
Flame Spread	0 ASTM E84-08
Smoke Development	40 ASTM E84-08
Fire Rating	Class A/Class 1